


MITSUBISHI

ASX

Plug-in Hybrid (2023 -)





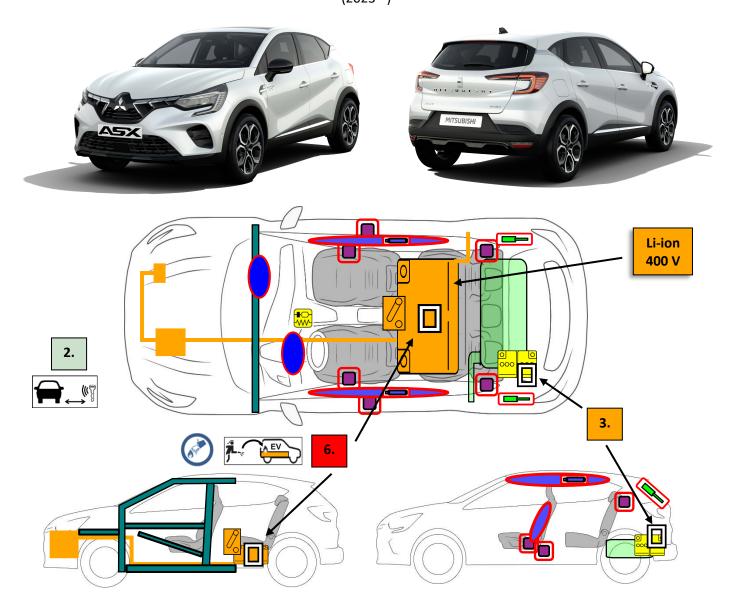

	Airbag		Stored gas inflator		Seat belt pretensioner	SRS control unit		Pedestrian protection active system
	Automatic rollover protection system		Gas strut / Preloaded spring		High strength zone	Zone requiring special attention		
000 000	Battery low voltage	HH	Ultra- capacitor, low- voltage		Fuel tank	Gas tank	×	Safety valve
0 0	Battery pack, high-voltage	7	High voltage power cable	0	High voltage device that disconnects high voltage	Fuse box disabling high voltage	<u> </u>	High voltage ultra- capacitor

ID No.	Version No.	Version Date.	Page
RS-HJB PHEV-ENRS-EN01	01	03/2023	1/4

1. Identification / recognition



2. Immobilisation / stabilisation / lifting


Engine shutdown





Forbidden wedge area





Orange cables area

3. Disable direct hazards / safety regulations

12 Volts Battery







In case of airbag release, the 12V battery automatically turns off



ID No.	Version No.	Version Date.	Page
RS-HJB PHEV-ENRS-EN01	01	03/2023	2/4


400 Volts battery



Only if cutting operation is necessary:

Disconnection of the 400 Volts battery by removing the service plug.























4. Access to the occupants

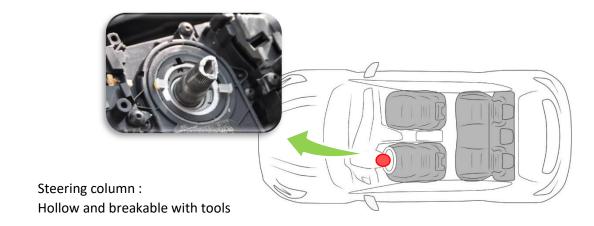

5. Stored energy / liquids / gases / solids



Lithium-ion

9.8 kW.h

400 V





39 L

ID No.	Version No.	Version Date.	Page
RS-HJB PHEV-ENRS-EN01	01	03/2023	3/4

6. In case of fire

Extinguishing a traction battery fire propagation

















If traction battery on fire : → Water extinguishing by filling


TAILGATE GAS STRUTS







Risk of missile effect of gas struts




7. In case of submersion





No electrical hazard

10. Explanation of pictograms used

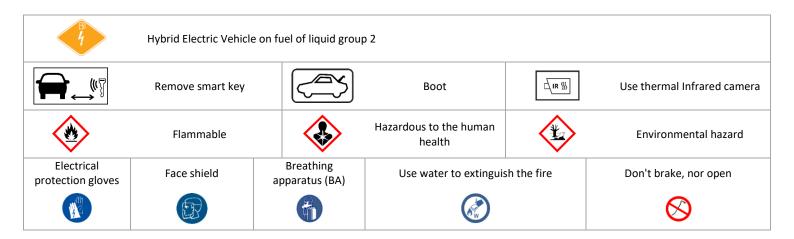

ID No.	Version No.	Version Date.	Page
RS-HJB PHEV-ENRS-EN01	01	03/2023	4/4